

GCE Examinations

Advanced Subsidiary / Advanced Level

**Mechanics**  
**Module M1**

Paper G

**MARKING GUIDE**

This guide is intended to be as helpful as possible to teachers by providing concise solutions and indicating how marks should be awarded. There are obviously alternative methods that would also gain full marks.

Method marks (M) are awarded for knowing and using a method.

Accuracy marks (A) can only be awarded when a correct method has been used.

(B) marks are independent of method marks.




*Written by Shaun Armstrong & Chris Huffer*

© *Solomon Press*

*These sheets may be copied for use solely by the purchaser's institute.*

**M1 Paper G – Marking Guide**

1.



resolve  $\uparrow$ :  $R + T = 10g$ ;  $R + \frac{3}{2}R = 10g$  M2

$\frac{5}{2}R = 10g$ ;  $\therefore R = 4g$  so  $T = 6g$  A1

moments about pivot:  $10gx - 4(6g) = 0$  M1

$10gx = 24g$ , so  $x = 2.4$  and hence c.o.m. is 4.4 m from A M1 A1 (6)

---

2. (a) mass of ball remains constant, force is constant

$F = ma$  so  $a$  constant B2

(b) (i)  $\mathbf{a} = \frac{\Delta \mathbf{v}}{t} = \frac{1}{4} [(10\mathbf{i} + 9\mathbf{j}) - (2\mathbf{i} - 3\mathbf{j})] = 2\mathbf{i} + 3\mathbf{j}$  M1 A1

mag. of  $\mathbf{a} = \sqrt{2^2 + 3^2} = \sqrt{13} = 3.61 \text{ ms}^{-2}$  (3sf) M1 A1


(ii)  $F = ma = 2(2\mathbf{i} + 3\mathbf{j}) = 4\mathbf{i} + 6\mathbf{j}$  M1

req'd angle =  $\tan^{-1} \frac{3}{2} = 56.3^\circ$  (3sf) M1 A1 (9)

---

3. (a) particle B1

(b)

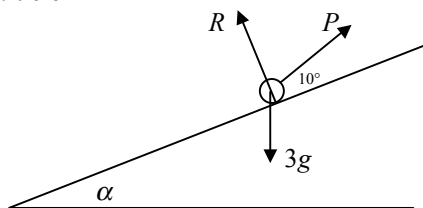

resolve // to plane:  $P \cos 10^\circ - 3g \sin \alpha = 0$  M1 A1

$P \cos 10^\circ = 3g(\frac{3}{5})$   $\therefore P = 17.9$  (1dp) M1 A1

(c) resolve perp. to plane:  $R + P \sin 10^\circ - 3g \cos \alpha = 0$  M1 A1

$R = 3g(\frac{4}{5}) - P \sin 10^\circ = 20.4 \text{ N}$  (1dp) M1 A1 (9)

---

4. (a) cons. of mom.  $0.05(400) = (0.05 + 4.95)v$  M2

$20 = 5v$   $\therefore v = 4 \text{ ms}^{-1}$  A1

(b)  $R = mg$ ;  $F = ma$  M1

but  $F = \mu R$ ;  $\therefore a = \frac{-\mu R}{m} = \frac{-\mu mg}{m} = -\mu g$  M1 A1


use with  $u = 4$ ,  $v = 0$ ,  $s = 4$  M1

$v^2 = u^2 + 2as$ , so  $0 = 16 - 8\mu g$  M1


$\mu = \frac{16}{8g} = \frac{2}{g}$  A1 (9)

---

5. (a) disp. of F rel to G =  $[(2t - 3) - 2]\mathbf{i} + (t - 5)\mathbf{j} = (2t - 5)\mathbf{i} + (t - 5)\mathbf{j}$  M1 A1  
 (b)  $d^2 = (2t - 5)^2 + (t - 5)^2$  M1  
 $= 4t^2 - 20t + 25 + t^2 - 10t + 25 = 5t^2 - 30t + 50$  M1 A1  
 $= 5(t^2 - 6t + 10) = 5[(t - 3)^2 + 1]$  M2  
 min.  $d^2$  (and hence  $d$ ) when  $t = 3$  A1  
 (c) when  $t = 3$ ,  $d^2 = 5$  M1 A1  
 dist. =  $\sqrt{5} = 2.24$  m (3sf) A1 (11)

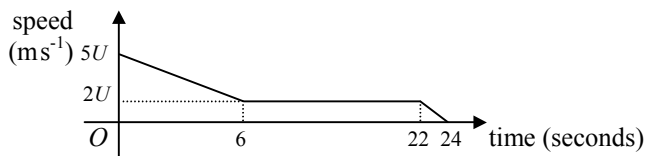6. (a)  B2  
 (b) using  $v = u + at$  with  $v = 2U$ ,  $u = 5U$ ,  $t = 6$  gives 1<sup>st</sup> decel. =  $\frac{1}{2} U \text{ ms}^{-2}$  M1 A1  
 using  $v = u + at$  with  $v = 0$ ,  $u = 2U$ ,  $t = 2$  gives 2<sup>nd</sup> decel. =  $U \text{ ms}^{-2}$  M1 A1  
 (c) area under graph = dist. travelled = 220 m M1  
 $\frac{1}{2}(6)(3U) + 22(2U) + \frac{1}{2}(2)(2U) = 220$  M1 A2  
 $55U = 220 \therefore U = 4 \text{ ms}^{-1}$  M1 A1 (12)

7.



- (a)  $M_C : M_T = 1200 : 800 = 3 : 2$   $R_C = 300 \text{ N} \therefore R_T = 200 \text{ N}$  M1 A1  
 (b) for car and trailer, eqn. of motion is  $3000 - 500 = 2000a$  M1  
 giving  $a = \frac{5}{4} \text{ ms}^{-2}$  M1 A1  
 (c) for car, eqn. of motion is  $3000 - 300 - T = 1200 \times \frac{5}{4}$  M1  
 giving  $T = 1200 \text{ N}$  M1 A1  
 (d) total of braking + resistive forces = 1500 N  
 $-1500 = 2000a$  so  $a = -\frac{3}{4} \text{ ms}^{-2}$  M1 A1  
 $u = 24$ ,  $v = 0$ ,  $a = -\frac{3}{4}$  use  $v^2 = u^2 + 2as$  M1  
 $0 = 576 - \frac{3}{2}s \therefore s = 384 \text{ m}$  M1 A1  
 (e) for car ( $\leftarrow$ ):  $T + 1000 + 300 = 1200(\frac{3}{4})$  M1 A1  
 $T = -400 \text{ N} \therefore T = 400 \text{ N}$ , pushing the car M1 A1  
 (f) e.g. unlikely to be realistic, likely to decrease as speed decreases B2 (19)

Total (75)

